


Lifting capacity Diagram Sidexcavator ZX3! Frontal Configuration

Load Overhang (Mt)	Max lift Capacity (Kg)	Lift. cap.tyTon 85% (Kg)
1,2	58333	49.583
2	34250	29.113
3	22000	18.700
4	15500	13.175
5	11600	9.860
6	8833	7.508

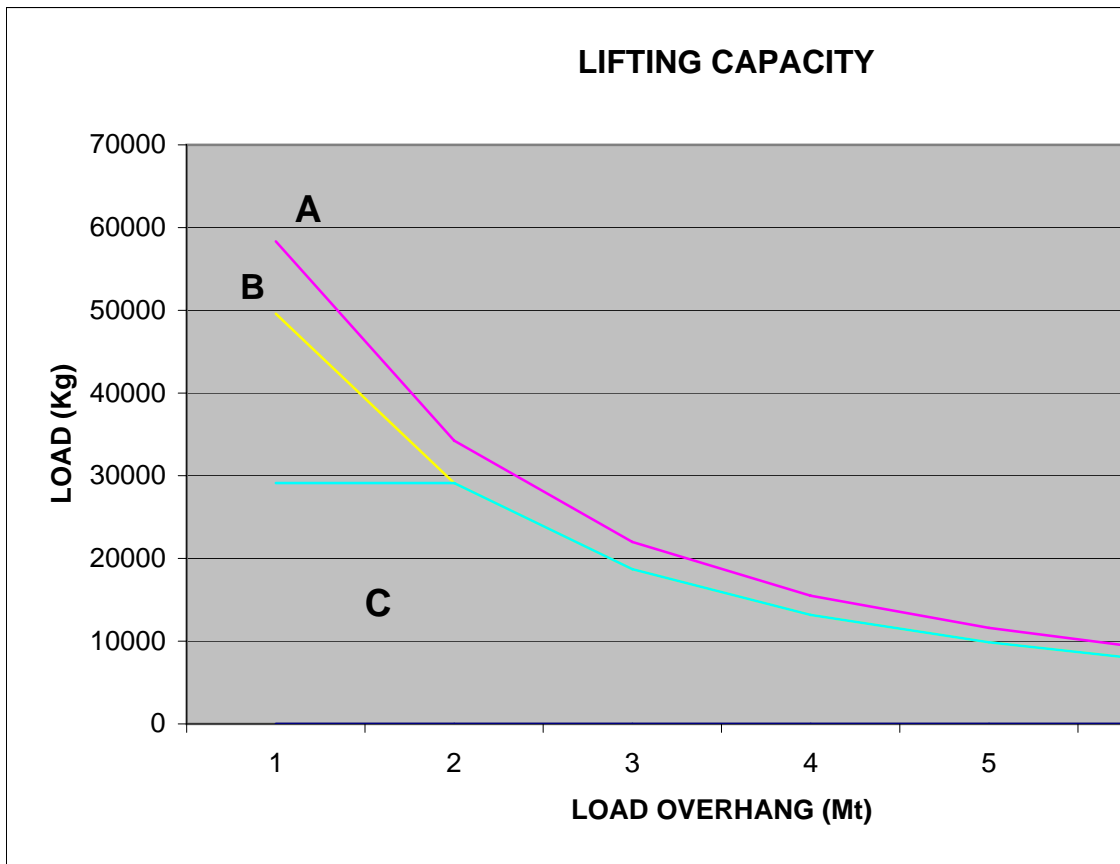


- A** - Max lift capacity per ISO 8813
- B** - Rated load per ANSI/ASME B30.14
- C** - Working range per ANSI/ASME B30.14

Lifting capacity Diagram Sidexcavator ZX3! Lateral Configuration

Load	Max lift	Lift.
------	----------	-------


Overhang (Mt)	Capacity (Kg)	cap.tyTon 85% (Kg)
1,2	47500	40.375
2	27750	23.588
3	18000	15.300
4	13000	11.050
5	10000	8.500
6	8000	6.800

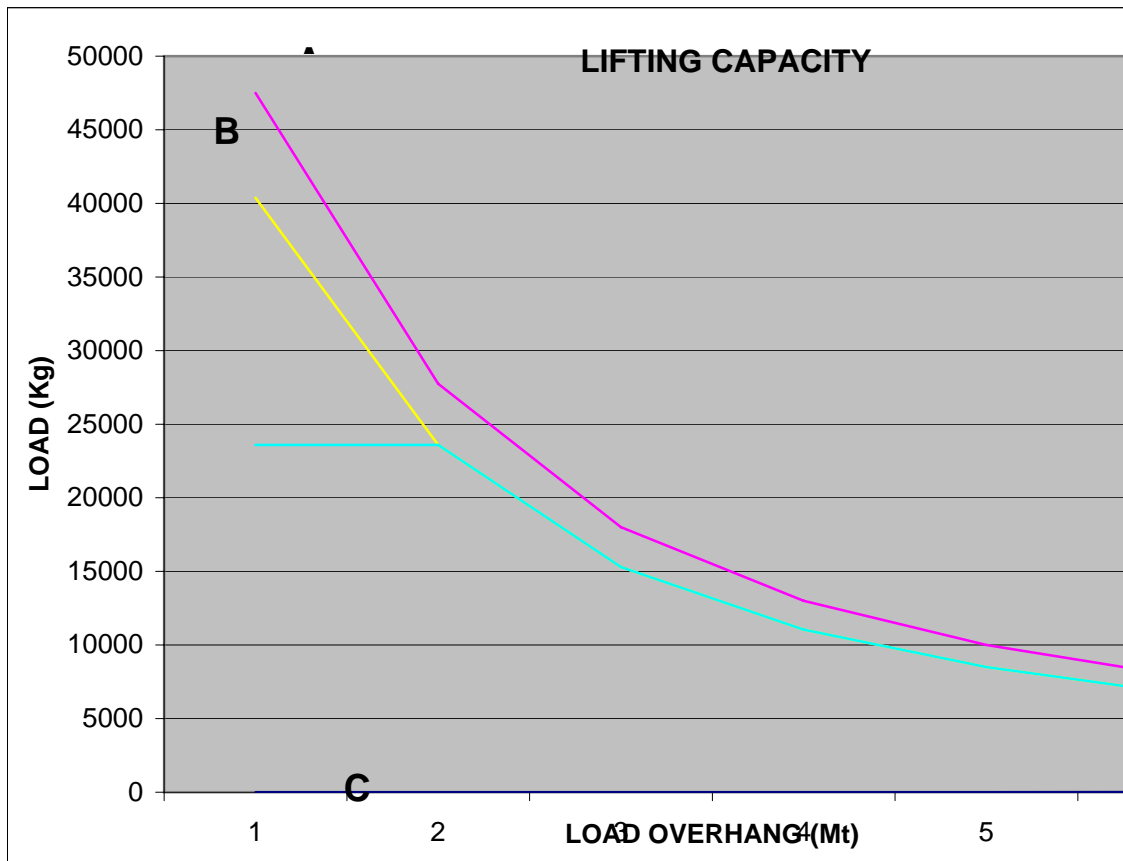


- A** - Max lift capacity per ISO 8813
- B** - Rated load per ANSI/ASME B30.14
- C** - Working range per ANSI/ASME B30.14

50

Working range (Kg)
29.113
29.113
18.700
13.175
9.860
7.508

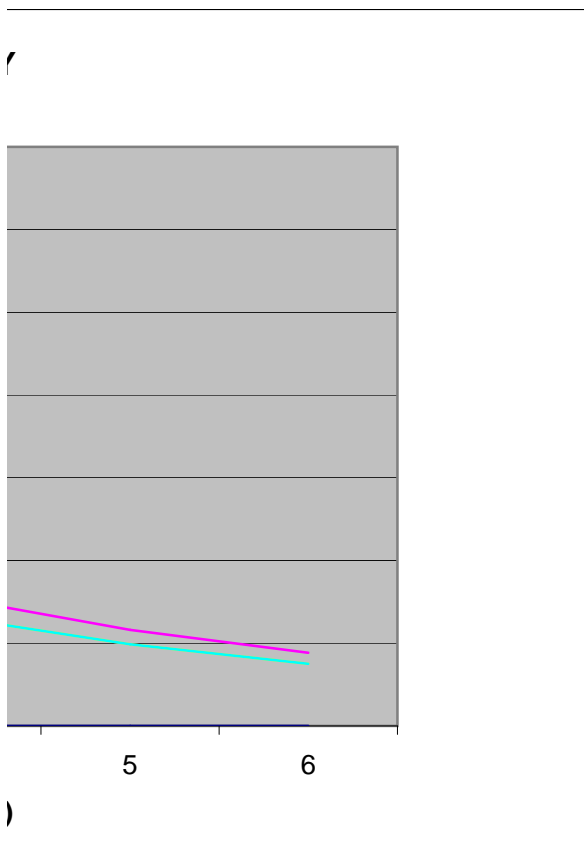

50



Working range (Kg)
23.588
23.588
15.300
11.050
8.500
6.800

