EAURINI PIPELAYERS

TECHNICAL DATA SHEET

Laurini Officine Meccaniche Srl

Località Spigarolo, 43011 Busseto (PR), Italy Phone: +39 0524.91844 Fax: +39 0524.91428 www.laurini.com E-mail: laurini@laurini.com VATIT 02164990349



Sansong 70





SansOne 70 is our intermediate size machine and is characterized by an *undercarriage variable gauge*, to facilitate transport and guarantee superior stability to all other machines of the same size. The seat rotates together with all the controls positioned on the armrests and allows the operator to work without having to turn his neck.

The machine is equipped with ROPS protection, in which a closed cab with wide visibility, with heating and air conditioning can be mounted. The integrated anti-tipping system processes the position of the counterweight, adapting the relative lifting capacity, showed on a 12" display.

LAURINI






SANSURA / TECHNICAL DATA SHEET

Technical Data

Engine	CAT C7.1 - da 302HP@2200rpm - EU Stage V
Hydrostatic transmission	Danfoss
Machine Weight - working configuration	46.000,00 kg
Speed	6,0 km/h
Operator protection	Roll-bar ROPS-FOPS
Maximum load capacity	70 ton
Winches	Max speed 80 mt/min
Ropes	19 mm diameter
Standard arm	7 mt
Track shoes width	711 mm
Wheel center distance	3700 mm

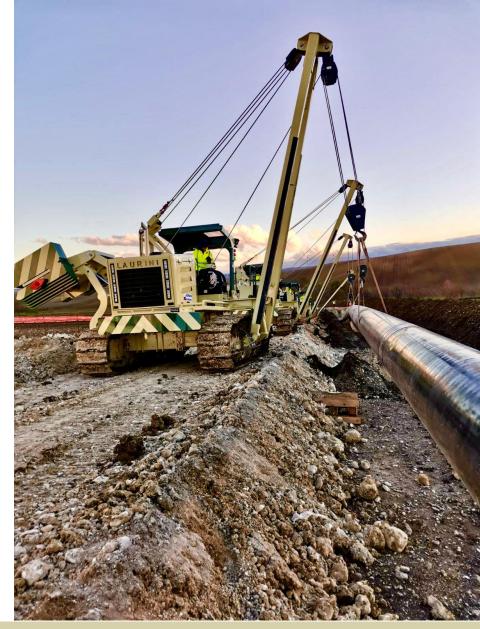



EAURINI PIPELAYERS

SansOne 70

TECHNICAL DATA SHEET

LIFTING CAPACITY WITH EXTENDED COUNTERWEIGHT

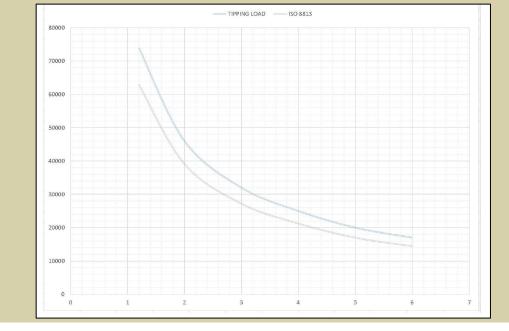

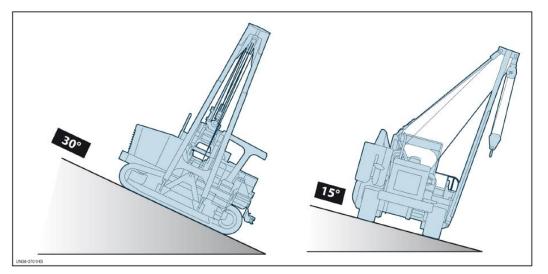




EAURINI SANSONG 70 TECHNIC

TECHNICAL DATA SHEET


EAURINI PIPELAYERS SANSONG 70 TECHNICAL DATA SHEET

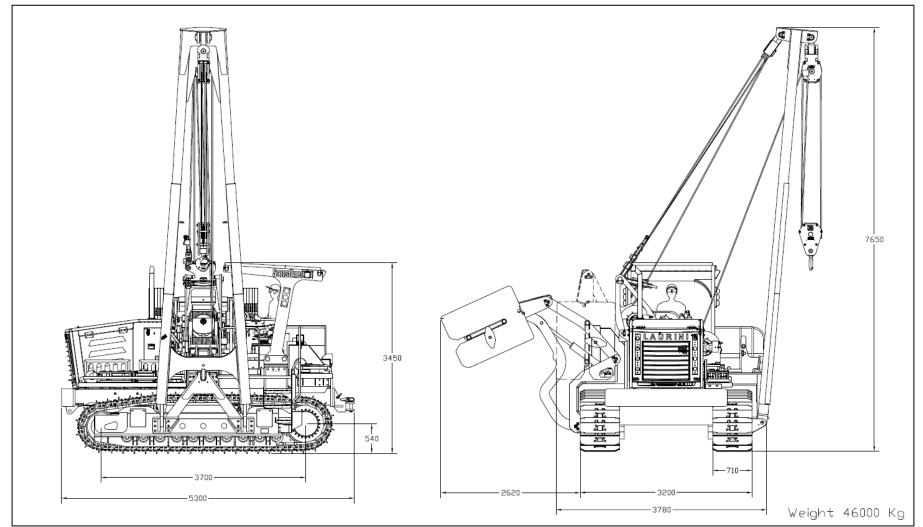

OVERALL DIMENSIONS

TRANSPORT DIMENSIONS

EAURINI

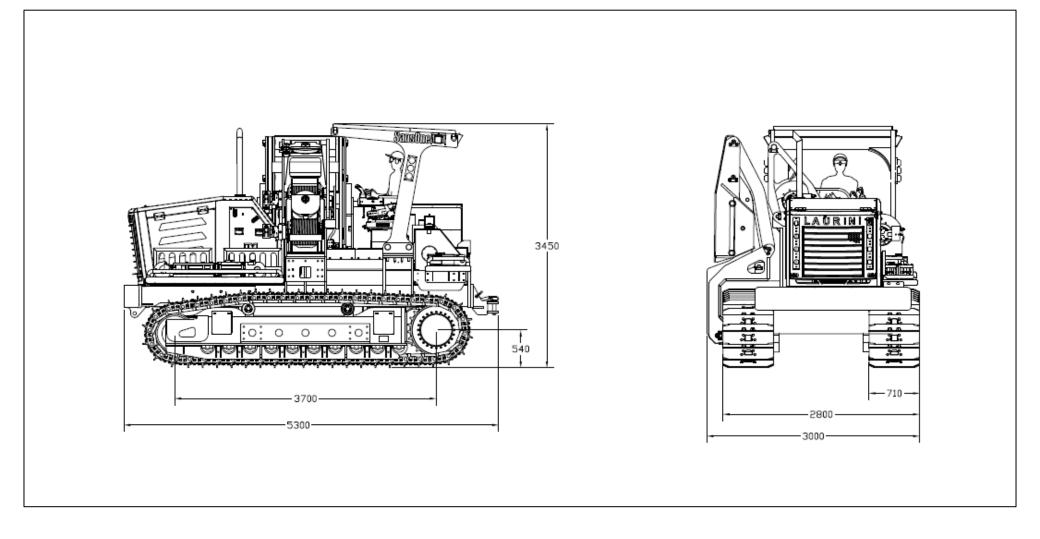

SANSING 70 TECHNICAL DATA SHEET